

F

SMITH® JAY R. SMITH MFG. CO.®
MEMBER OF MORRIS GROUP INTERNATIONAL
POST OFFICE BOX 3237
MONTGOMERY, ALABAMA 36109-0237 (USA)
TEL: 334-277-8520 FAX: 888-377-7818 www.jrsmith.com



LOCATION

DRAWING NUMBER
S0675

SIZE
A

SCALE:
NONE

DATE:
3-13-68

APPROVED BY:
RP

CHECKED BY:
RP

DRAWN BY:
RD

0675 and 0688 SERIES


FIGURE NUMBER

WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA

WE CAN ASSUME NO RESPONSIBILITY FOR TOLERANCE AND CHANGE WITHOUT NOTICE

VERTICAL OFFSET WASTE FITTING

FOR USE WITH FLOOR MOUNTED BACK OUTLET CLOSET

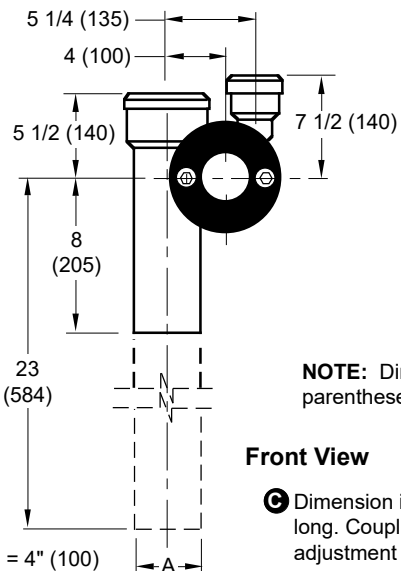

5 1/4 (135)
4 (100)
5 1/2 (140)
7 1/2 (140)
8 (205)
23 (584)


NOTE: Dimensions shown in parentheses are in millimeters.

Front View

Ⓢ Dimension is regularly furnished 4" (100) long. Coupling provides 3/4" (19) adjustment in either direction.

A (Pipe Size) = 4" (100)

Fig. 0675L . . . LEFT HAND
Fig. 0675R . . . RIGHT HAND (SHOWN)
Fig. 0675D . . . DOUBLE
Fig. 0688L . . . LEFT HAND LONG BARREL
Fig. 0688R . . . RIGHT HAND LONG BARREL
Fig. 0688D . . . DOUBLE LONG BARREL

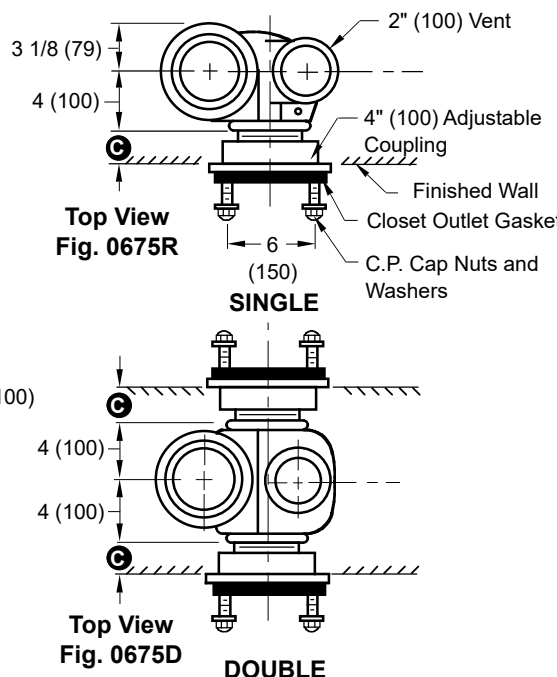

3 1/8 (79)
4 (100)
2" (100) Vent
4" (100) Adjustable Coupling
Finished Wall
Closet Outlet Gasket
C.P. Cap Nuts and Washers
6 (150)


Top View Fig. 0675R
SINGLE

Top View Fig. 0675D
DOUBLE


Conforms to ASME A112.6.1M

The water closet gasket regularly furnished is designed to fit water closet outlet dimensions and configurations shown in ANSI Standard A112.19.2. If gasket is not found to be compatible to fixture due to nonconformance of said fixture to ANSI A112.19.2, then fixture manufacturer shall be consulted for a suitable gasket recommendation. Jay R. Smith assumes no liability for connections to fixtures which do not conform to these standards.

TYPICAL APPLICATION

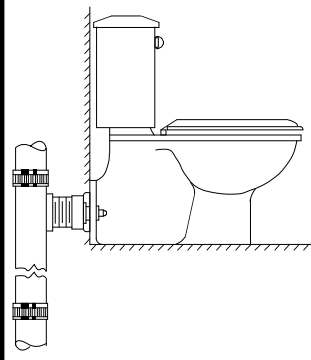

OUTLET CONNECTIONS

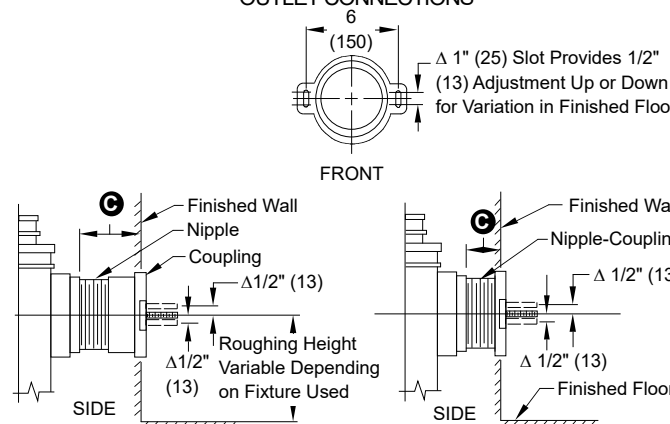

6 (150)
Δ 1" (25) Slot Provides 1/2" (13) Adjustment Up or Down for Variation in Finished Floor

FRONT

Finished Wall
Nipple
Coupling
Δ 1/2" (13)
Roughing Height
Variable Depending on Fixture Used
Δ 1/2" (13)
Finished Floor

SIDE

REGULARLY FURNISHED

TYPE 2M (When Specified)

NIPPLE LENGTHS AVAILABLE

NIPPLE LENGTH	MIN	Ⓢ MAX
2 1/2 (64)	2 3/4 (70)	3 3/4 (95)
*3 1/4 (83)	3 (76)	4 1/2 (115)
4 1/2 (115)	4 1/4 (110)	5 3/4 (145)
5 1/4 (135)	5 (125)	6 1/2 (165)
6 1/4 (160)	6 (150)	7 1/2 (190)
7 (180)	6 3/4 (170)	8 1/4 (210)
8 1/4 (210)	8 (205)	9 1/2 (240)
10 (255)	9 3/4 (250)	11 1/4 (285)
12 (305)	11 3/4 (300)	13 1/4 (335)
15 (380)	14 3/4 (375)	16 1/4 (415)
18 (455)	17 3/4 (450)	19 1/4 (490)

* Regularly Furnished

FEDC

4-17-24
3-13-19
3-18-14
5-14-13

Added ASME Note
Added Notes
Revised Dimensions
Revised Text

HS
TBW
TBW
TBW

JT
CL
CL
CL

WEIGHT
POUNDS

VOLUME
CUBIC FEET

FIGURE NUMBER
0675 and 0688
SERIES

REV.

DATE

DESCRIPTION

BY

CKD. BY

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov