

LARGE SPECIAL PURPOSE ROOF DRAINS

RAINTROL® ROOF DRAIN

FLAT ROOF DESIGN

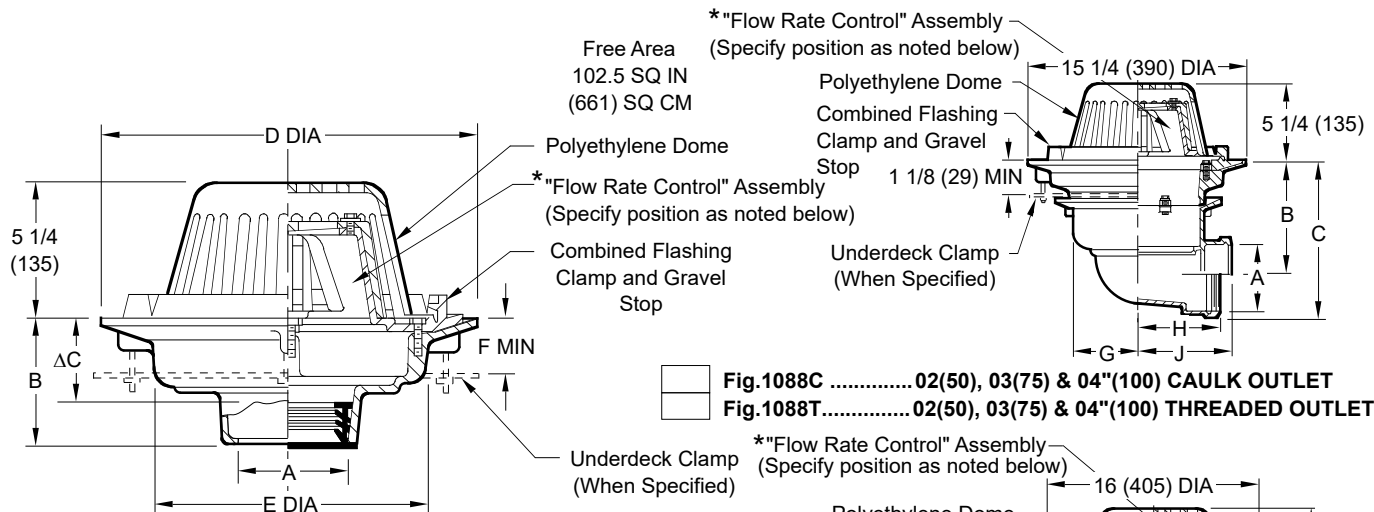


Fig.1088C	02(50), 03(75) & 04"(100) CAULK OUTLET
Fig.1088T	02(50), 03(75) & 04"(100) THREADED OUTLET

	Fig. 1083C	CAULK OUTLET
	Fig. 1083Y.....	NO-HUB OUTLET
	Fig. 1083T	THREADED OUTLET

ΔThis Dimension to Internal Stop of Speedi-Set® Gasket.

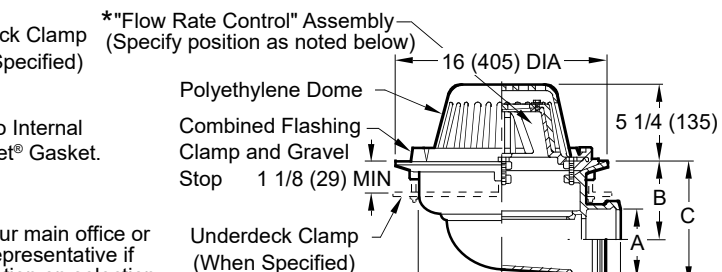


	Fig. 1088C05(125) & 06"(150) CAULK OUTLET
	Fig. 1088T.....05(125) & 06"(150) THREADED OUTLET

recommended deck opening

outlet size	with suffix-R	less suffix-R
02(50),03(75),04(100) 05(125),06(150)	17(430) DIA	14(355) DIA

NOTE: Please call our main office or your local Representative if more information on selection, sizing and placement of our "Raintrol" roof drains is required.

A SIZE	B (BOTTOM OUTLET)						SIDE OUTLET		
	CAULK, NO-HUB, & SPEEDI-SET®	THREADED	C	D DIA	E DIA	F MIN	G	H	J
02(50),03(75),04(100)	5(125)	3 3/4(95)	3 3/4(95)	15 1/4 (390)	11(280)	1 1/8(29)	4 3/4(120)	6(150)	7 3/4(195)
05(125),06(150),8(200)	5(125)	3 3/4(95)	3 3/4(95)	15 1/4 (390)	11(280)	1 1/8(29)	6 1/4(160)	6 7/8(175)	7 3/4(195)

(SIDE OUTLET)					
A SIZE	02(50)	03(75)	04(100)	05(125)	06(150)
B	6 7/8 (175)	6 3/8 (162)	5 7/8 (149)	5 (125)	4 1/2 (115)
C	8 5/8 (219)	8 3/4 (220)	8 3/4 (220)	8 1/2 (215)	8 1/2 (215)

REGULARLY FURNISHED:

Duco Cast Iron Body with Combined Flashing Clamp and Gravel Stop with Adjustable "Flow Rate Control" Assembly and Polyethylene Dome.

VARIATIONS:

- | | |
|--------------------------|---|
| ☐ | Expansion Joint (Specify Fig. 1710) (Fig. 1083 only) |
| ☐ | Extension (Specify Height) -E |
| ☐ | "L" Shaped Underdeck Clamp -CL |
| ☐ | L Speedi-Set® Service Weight |
| | 02(50), 03(75) & 04"(100) sizes only (Fig. 1083 only) |
| ☐ | LXH Speedi-Set® Extra Heavy |
| | 02(50), 03(75) & 04"(100) sizes only (Fig. 1083 only) |
| ☐ | NO-HUB Adaptor (Specify Fig. 2646Y) (Fig. 1088 only) |
| ☐ | Secondary Flashing Clamp -C2 |
| ☐ | Sump Receiver -R |
| ☐ | Underdeck Clamp -C |
| ☐ | Vandal Proof Dome -U |
| ☐ | Roof Deck Plate -RDP |

OPTIONAL MATERIALS:

- | | |
|--|---------------------------------------|
| | ▲ Aluminum Dome -AD |
| | ▲ Cast Iron Dome -CID |
| | Galvanized Cast Iron Body & Collar -G |
| | ▲ Galvanized Cast Iron Dome -CIDG |
| | ▲ Rough Bronze Dome -RBD |

▲ Optional domes' free area are as follows:

Aluminum	98 (632)
Cast Iron	80 (516)
Bronze	95 (613)

NOTE: Dimensions shown in parentheses are in millimeters.

ALWAYS SPECIFY NUMBER OF WEIR OPENINGS

(-WR1)	(-WR2)	(-WR3)	(-WR4)

***NOTE:**

(-WR1) 1 WEIR OPENING
(-WR2) 2 WEIR OPENING
(-WR3) 3 WEIR OPENING
(-WR4) 4 WEIR OPENING

M L K J	3-27-24 9-28-23 3-8-23 4-13-16	Revised Variations, Fig. Opts Removed Function Added ® to "Speedi-Set" Revised Variations	HS HS KK TBW	CL CL CL CL	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER 1083,1088
REV.	DATE	DESCRIPTION	BY	CKD. BY			



WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov