


FIGURE NUMBER	9667	DRAWN BY: TBW	CHECKED BY: PJ	APPROVED BY: PJ	DATE: 3-30-15	SCALE: NONE	SIZE A	DRAWING NUMBER s9667	N
------------------	-------------	------------------	-------------------	--------------------	------------------	----------------	-----------	-------------------------	---

DIMENSIONS ARE SUBJECT TO MANUFACTURER'S TOLERANCE AND CHANGE WITHOUT NOTICE.

WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA.

Fine-Line® STAINLESS STEEL ADA LINEAR DRAIN

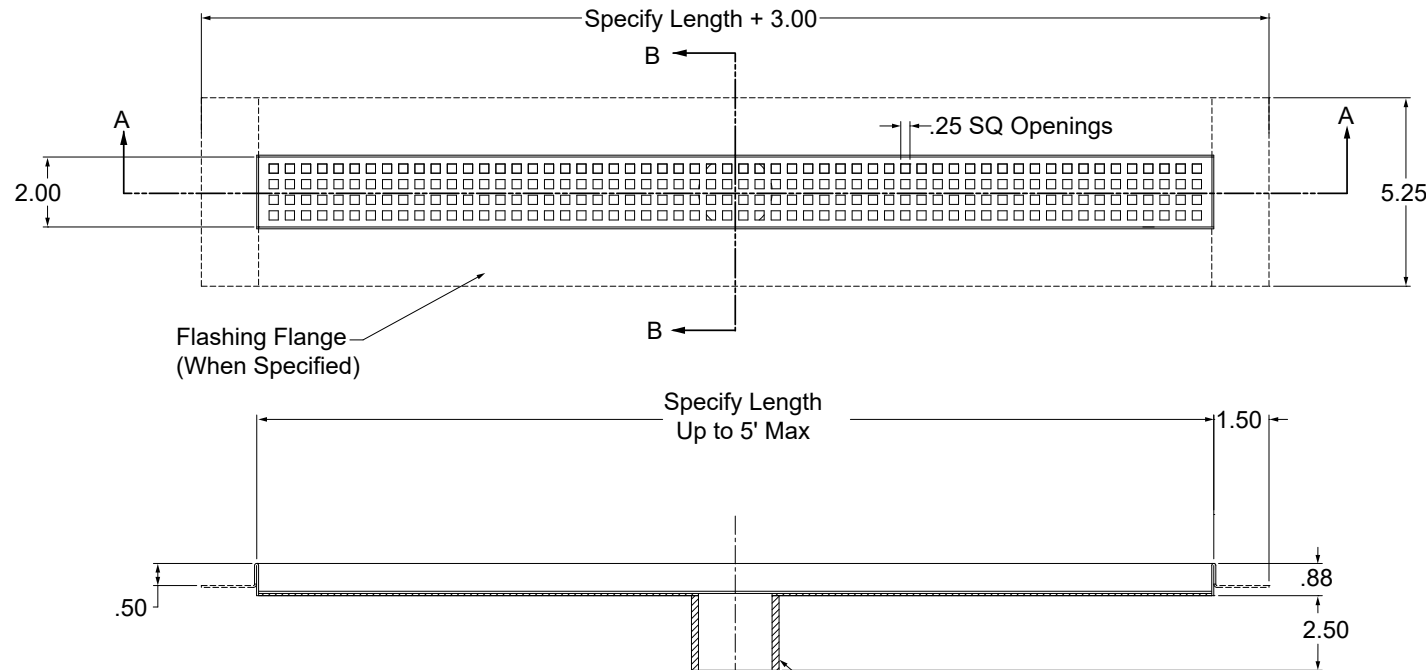


Fine-Line™ Linear Drains



NOTE: Grate Locking Bars Should Be Located Away From Over The Outlet. Outlet Opening Must Be Clear Of Obstructions.

SECTION A-A — 2" NO-HUB Outlet



SECTION B-B

REGULARLY FURNISHED:

Fabricated 18 Ga Type 304 Stainless Steel Body with Satin Finish and Loose Set Stainless Steel Perforated Grate (-SPG) and 2" NO-HUB Bottom Outlet. Grate has .25 Square Perforations.

VARIATIONS:

- ☐ Slotted Grate -SLG
- ☐ Wave Grate -WG
- ☐ Solid Rim Flow Grate -SRFG
- ☐ Tile Inlay Grate -TIG
- ☐ Secured Grate -U
- ☐ Flashing Flange -F
- ☐ 2" NPT Female Threaded Outlet

OPTIONAL MATERIALS:

- ☐ 316 Stainless Steel -316


OPTIONAL FINISHES:

- ☐ High Polished Finish -HP

LENGTHS AVAILABLE:

- ☐ 12" ☐ 36" ☐ 60"
- ☐ 24" ☐ 48"

NOTE: See Back Sheet for Grates

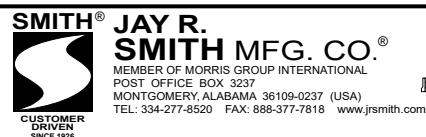

N	8-24-23	Removed Function	HS	CL
M	3-9-23	Added NOTE	KK	PJ
L	1-19-23	Added UPC	KK	PJ
K	1-17-23	Updated Title	KK	PJ
REV.	DATE	DESCRIPTION	BY	CKD.



WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

FIGURE NUMBER	9667-BS	DRAWN BY: TBW	CHECKED BY: PJ	APPROVED BY: PJ	DATE: 3-31-15	SCALE: NONE	SIZE A	DRAWING NUMBER s9667-BS	D
------------------	----------------	------------------	-------------------	--------------------	------------------	----------------	-----------	----------------------------	---

DIMENSIONS ARE SUBJECT TO MANUFACTURER'S TOLERANCE AND CHANGE WITHOUT NOTICE.

WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA.

Fine-Line® OPTIONAL GRATES


Fine-Line®
Linear
Shower
Drains



☐ **PERFORATED GRATE -SPG (STANDARD GRATE)**


OPEN AREA OF GRATES IN
SQUARE INCHES

12"	6.25
24"	12.50
36"	18.75
48"	25.00
60"	31.25




☐ **TILE INLAY GRATE -TIG, GRATE SEAT DEPTH IS .50"**

12"	3.36
24"	6.72
36"	10.08
48"	13.44
60"	16.80

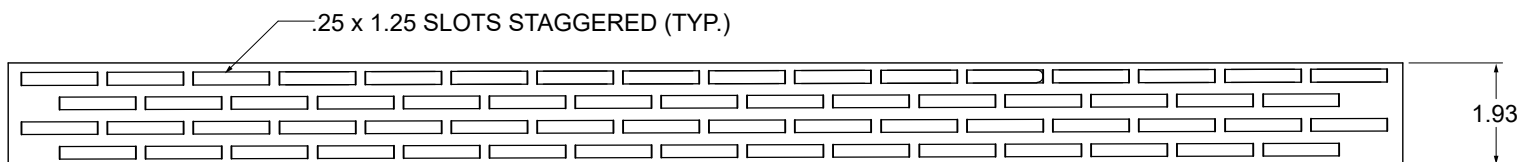


☐ **SLOTTED GRATE -SLG**

12"	8.59
24"	17.18
36"	25.77
48"	34.36
60"	42.95



☐ **WAVE GRATE -WG**

12"	5.84
24"	11.68
36"	17.52
48"	23.36
60"	29.20



☐ **SOLID RIM FLOW GRATE -SRFG**

12"	3.00
24"	6.00
36"	9.00
48"	12.00
60"	15.00

SMITH® JAY R. SMITH MFG. CO.®
MEMBER OF MORRIS GROUP INTERNATIONAL
POST OFFICE, BOX 3237
MONTGOMERY, ALABAMA 36109-0237 (USA)
TEL: 334-277-8520 FAX: 888-377-7818 www.jrsmith.com



D	10-9-23
C	2-28-20
B	11-13-19
A	11-17-16

Revised DWG
Revised Var. -SG to -SLG
Added Tile Grate Seat Depth
Added -SPG Grate and Tables

HS	MD
MW	PJ
MW	PJ
TBW	MD

REV.	DATE	DESCRIPTION	BY	CKD.
------	------	-------------	----	------



WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov